

MATX-6933


Based on Intel H61 Chipset Micro ATX Motherboard



Product:

- ◆ Based on Intel H61 chipset, supporting the 2nd /3rd generation Intel Core i7/i5/i3 processor
- ◆ 2x dual channel DIMM memory slot, supports DDRIII 1066/1333 MHz, single slot memory up to 8G, entire board memory up to 16GB
- ◆ Supports 2xVGA display interface
- ◆ Provide 3x SATA2.0, 6x COM (supports up to 18xCOM via expansion board) , 2x USB3.0, 12x USB2.0 (supports up to 12x USB2.0, 6x USB3.0 via expansion board) , 2x LAN, 8x GPIO, supports Line out 、 Line in、 MIC in
- ◆ Supports 1x PCIE X16、 1x PCIE X1、 2x Mini-PCIE (1xstandard Mini PCIE supports WIFI, 1xsupports Msata)
- ◆ Size: 244mmx 244mm

Dimension:

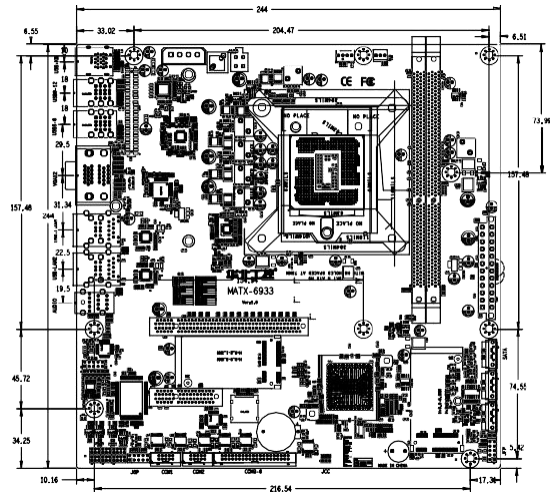

Specification:

- CPU
Supports the 2nd /3rd generation Intel Core i7/i5/i3 processor
- ◆ Chipset
Intel H61 chipset
- Memory
2xdual channel DIMM memory slot, support DDRIII 1333/1600MHz, single slot memory up to 8G, entire board memory up to 16GB
- BIOS
32MB SPI BIOS
Super I/O
NW83627DHG-P
- Ethernet
2x LAN 10/100/1000Mbps, RTL8111F
- ◆ Graphic Control
- Processor integration
- ◆ Display Port
Supports 2xVGA
- ◆ Audio
ALC662 audio control chip,
Supports Line out 、 Line in、 MIC in
- I/O Interface
3x SATA2.0, 6x COM (supports up to 18xCOM via expansion board) , 2x USB3.0, 12x USB2.0 (supports up to 12x USB2.0, 6x USB3.0 via expansion board)
- ◆ Expansion Interfaces
1x PCIE X16、 1x PCIE X1、
2x Mini-PCIE(1xstandard Mini PCIE supports WIFI, 1xsupports Msata)
- GPIO
8xGPIO
- Watch dog
Supports hardware reset function
- ◆ Fan Interface
1x CPU FAN, 1x SYS FAN
- ◆ Power supply
Standard ATX 20Pin + 4Pin power supply
- ◆ Temperature
Operating Temperature : 0°C ~ 60°C
Storage Temperature: -40°C ~ 85°C
- Humidity
5% ~ 95% RH, non-condensing
- ◆ Size
244mmX244mm