


PPC-3321

21.5" LCD Touch Screen Industrial Tablet PC

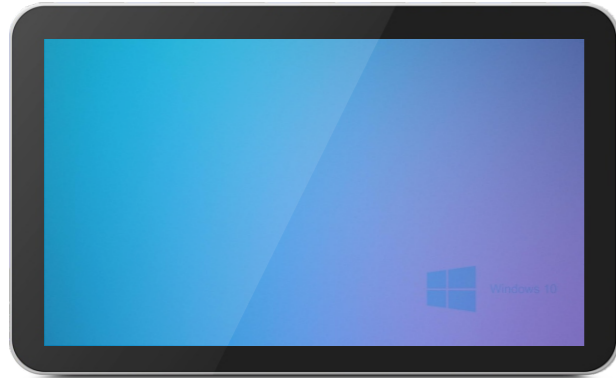

Product :

- 21.5" LCD touch screen industrial tablet PC
- Maximum resolution:1920x1080
- Support HDMI display output
- Support 1x 2.5" hard disk bracket , built-in 1x mSATA port
- Up to 4x LAN , 6x USB , 6x COM
- Support 9-36V wide voltage power supply
- New fanless wide temperature heat dissipation structure
- VESA compliant wall-mounted interface

Specification :

Model	PPC-3321H	PPC-3321C	PPC-3321F	PPC-3321G		
Display	Screen Size	21.5"	21.5"	21.5"		
	Screen	LCD	LCD	LCD		
	Aspect Ratio	16:9	16:9	16:9		
	Resolution	1920x 1080	1920x 1080	1920x 1080		
	Contrast Ratio	3000:1	3000:1	3000:1		
	Brightness(cd/m2)	250cd/m2	250cd/m2	250cd/m2		
	Max. Color	16.7M	16.7M	16.7M		
	Operating T	0°C ~ 50°C	0°C ~ 50°C	0°C ~ 50°C		
Touch Screen	Capacitive / resistive	Capacitive / resistive	Capacitive / resistive	Capacitive / resistive		
Motherboard	Model	BPC-7975	BPC-7948	BPC-7966		
	Processor	Support the 6th/7th generation Intel Core i3/i5/i7 35W processor (2M Cache, Up to 2.42 Ghz , 4 core)	Intel Celeron J1900	Intel Skylake-U 14nm BGA1356 processor	Intel Ivy/Sandy Bridge i3/i5/i7 processor	
	Chipset	Intel H110	Intel Bay Trail	Intel Skylake-U	Intel HM76	
Memory	Socket	On board 8GB+1xSODIMM slot	1x SODIMM slot	1x SODIMM slot	On board 4GB+1x SODIMM slot	
	Max. Capacity	24GB	8GB	16GB	12GB	
Storage	Technology	DDR4-1866/2133MHz	DDR3L-1066/1333MHz	DDR4-1866/2133MHz	DDR3-1333/1600MHz	
	SATA	2x SATA	1x SATA	1x SATA	2x SATA	
I/O Interface	mSATA	1x mSATA(MINI PCIE interface)	1x mSATA(MINI PCIE interface)	1x mSATA(MINI PCIE interface)	1x mSATA(MINI PCIE interface)	
	Display	1x HDMI	1x HDMI	1x HDMI	1x HDMI	
	Ethnet	4x LAN , INTEL I211	4x LAN , INTEL I211	2x LAN , INTEL I211	4x LAN , INTEL I211	
	Serial Port	2x RS232/RS422/RS485	2x RS232/RS422/RS485	2x RS232/RS422/RS485	2x RS232/RS422/RS485	
	USB	4x RS232/RS485	1x USB3.0 ; 5x USB2.0	4x RS232/RS485	2x RS232/RS485	
	System Control	Power switch	Power switch	Power switch	Power switch	
	MINI PCIE	2x MINI PCIE	2x MINI PCIE	2x MINI PCIE	2x MINI PCIE	
	MINI PCIE	1x support 3G/4G/WIFI optional 1x support MSATA	1x support 3G/4G/WIFI optional 1x support MSATA	1x support 3G/4G/WIFI optional 1x support MSATA	1x support 3G/4G/WIFI optional 1x support MSATA	
	Power	Power Input	DC 12V (9~36V optional)	DC 12V (9~36V optional)	DC 12V (9~36V optional)	DC 12V (9~36V optional)
	Chassis	Color	Black	Black	Black	Black
Material		High strength aluminum alloy	High strength aluminum alloy	High strength aluminum alloy	High strength aluminum alloy	
Installation		VESA(100*100mm with bracket)	VESA(100*100mm with bracket)	VESA(100*100mm with bracket)	VESA(100*100mm with bracket)	
Reliability	Size	536.5mmx 328mmx 60mm	536.5mmx 328mmx 60mm	536.5mmx 328mmx 60mm	536.5mmx 328mmx 60mm	
	Operating Temp.	0°C~50°C	0°C~50°C	0°C~50°C	0°C~50°C	
	Storage Temp.	-40°C~60°C	-40°C~60°C	-40°C~60°C	-40°C~60°C	
	Relative Humidity	5%~95% RH , non-condensing	5%~95% RH , non-condensing	5%~95% RH , non-condensing	5%~95% RH , non-condensing	
	MTBF	≥60,000H	≥60,000H	≥60,000H	≥60,000H	
OS	Windows/Linux	Windows/Linux	Windows/Linux	Windows/Linux		


Interfaces :



PPC-3321H Interfaces



PPC-3321C Interfaces

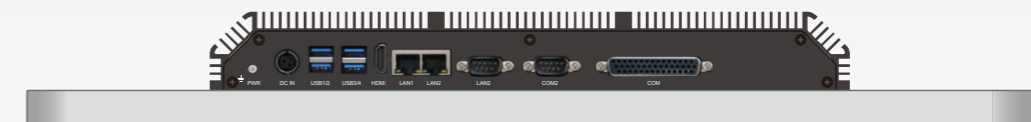

PPC-3321F Interfaces



PPC-3321G Interfaces

Dimension :

