


PPC-3311

11.6" LCD Touch Screen Industrial Tablet PC

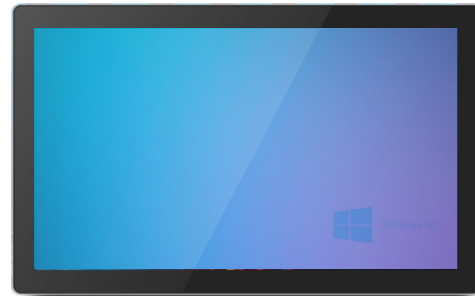

Product :

- 11.6" LCD touch screen industrial tablet PC
- Maximum resolution:1366x768(1920x1080)
- Support HDMI display output
- Support 1x 2.5" hard disk bracket , built-in 1x mSATA port
- Up to 4x LAN , 6x USB , 6x COM
- Support 9-36V wide voltage power supply
- New fanless wide temperature heat dissipation structure
- VESA compliant (100*100mm/75*75mm with bracket)

Specification :

| Model | PPC-3311C | PPC-3311F | |
|---------------|------------------------|--|--|
| Display | Screen Size | 11.6" | 11.6 " |
| | Screen | WLED backlight | WLED backlight |
| | Aspect Ratio | 16:9 | 16:9 |
| | Resolution | 1366x768(1920x1080) | 1366x768(1920x1080) |
| | Contrast Ratio | 800:1 | 800:1 |
| | Brightness(cd/m2) | 300cd/m2 | 300cd/m2 |
| | Maximum Color | 16.7M | 16.7M |
| | Operating T(°C) | 0°C~50°C | 0°C~50°C |
| Touch Panel | Capacitive / resistive | Capacitive / resistive | |
| Motherboard | Model | BPC-7948 | BPC-7966 |
| | Processor | Intel Celeron J1900 (2M Cache, Up to 2.42 Ghz , 4 core) | Intel Skylake-U 14nm BGA1356 processor |
| | Chipset | Intel Bay Trail | Intel Skylake-U |
| | Socket | 1x SODIMM slot | 1x SODIMM slot |
| Memory | Max. Capacity | 8GB | 16GB |
| | Technology | DDR3L-1066/1333MHz | DDR4-1866/2133MHz |
| Storage | SATA | 1x SATA | 1x SATA |
| | mSATA | 1x mSATA(MINI PCIE interface) | 1x mSATA(MINI PCIE interface) |
| I/O Interface | Display | 1x HDMI | 1x HDMI |
| | Ethernet | 4x LAN , INTEL I211 | 2x LAN , INTEL I211 |
| | Serial Port | 2x RS232/RS422/RS485 | 2x RS232/RS422/RS485 |
| | USB | 1x USB3.0 ; 5x USB2.0 | 4x USB3.0 |
| | System Control | Power switch 2x MINI PCie | Power switch 2x MINI PCie |
| | MINI PCIE | 1x support 3G/4G/WIFI optional 1x support MSATA | 1x support 3G/4G/WIFI optional 1x support MSATA |
| | Power | Power Input | DC 12V (9 ~ 36V optional) |
| Chassis | Color | Black | Black |
| | Material | High strength aluminum alloy | High strength aluminum alloy |
| | Installation Size | VESA(100*100mm/75*75mm with bracket) | VESA(100*100mm/75*75mm with bracket) |
| Reliability | Operating Temp. | 0°C~60°C | 0°C~60°C |
| | Storage Temp. | -40°C~60°C | -40°C~60°C |
| | Relative Humidity | 5%~95% RH , non-condensing | 5%~95% RH , non-condensing |
| | MTBF | ≥60,000H | ≥60,000H |
| | OS | Windows/Linux | Windows/Linux |

Interfaces :



PPC-3311C Interfaces



PPC-3311F Interfaces